



Job _____ Item No. _____

Universal Ventless Hood

MODEL □ WVU-72



Model WVU-72
(equipment sold separately)

DESCRIPTION

Wells Universal hoods are Certified Type-1 compliant, UL710B approved recirculation hood systems and feature completely self-contained air filtration and fire-suppression systems. They do not require venting outside making it possible to cook in non-traditional locations or when traditional Type-1 hoods and duct-work are impractical, restricted or too expensive. Operators can mix and match various electric cooking equipment under the hood such as fryers, ovens, griddles, steamers and more - providing greater flexibility and through-put.

SPECIFICATIONS

Fire Protection – Completely self contained ANSUL® R-102 system includes ANSUL® tank, nitrogen cartridge, ANSUL® sponanifier, piping, heat sensors, ANSUL® drops, nozzles, and movable manual pull station. Manual pull can be relocated to the egress position or an additional station can be added by an authorized ANSUL® representative. Front access for easy fire system maintenance. Fire protection system meets NFPA 96 Chapter 13. Fire protection system must be charged and certified by ANSUL® Authorized distributor after installation and before first use (operator's responsibility).

Filtration – Completely self-contained filtration process reduces emissions below that allowed in NFPA 96 and ANSI UL710B using the EPA 202 test method and includes stainless steel grease baffle filter with grease cup, fiberglass pre-filters, HEPA (High-Efficiency Particulate Air) filter/ carbon-charcoal filter pack. All filters are easily removable with out tools. Air flow sensors continually monitor air flow optimizing performance and grease removal while an interlock system will not allow cooking appliances to function if filters are missing, clogged or in the event of a fire.

Cooking Appliances – Only electrically heated appliances are acceptable for installation. Cooking equipment is optional from Wells or other manufacturers. Appliances must be installed as per manufacturers instructions and controlled thru the hood equipment shut-off interface through a customer supplied contractor which will disable cooking equipment in the event of fire or hood malfunction. For size, temperature and KW limits see back page or manual.

Exhaust and Air Flow – Exhaust air may be horizontal or vertical. Hoods are shipped for vertical discharge and are field convertible for horizontal discharge. Typical airflow is 3,000 CFM. A minimum of 1,600 cubic feet of fresh air per minute is recommended both in and out of the cooking area to ensure the dilution of cooking aromas.

STANDARD FEATURES

- ☐ Completely self-contained, 4-stage filtration system
- ☐ Completely self-contained fire protection system
- ☐ Very quiet with only 70 dBA average
- ☐ Interlock system will disable cooking appliances if filters are missing, clogged or in the event of a fire
- ☐ Airflow sensors continually monitor airflow for optimizing performance and grease removal
- ☐ Illuminated early-warning system to monitor filter replacement
- ☐ Completely self-contained filtration process reduces emissions below that allowed in NFPA 96 and ANSI UL710B using the EPA 202 test method
- ☐ Four LED lights producing 500 lumens each for improved visibility - light color temperature (cool white): 6000K
- ☐ Stainless steel construction for strength, durability and ease of cleaning
- ☐ Fits through a 36" wide door opening
- ☐ 6" to 8" adjustable legs (adjustable by 2" for leveling)
- ☐ Universal systems are movable making them ideal for leased properties
- ☐ Available in 208/240V, 1Ø
- ☐ **Limited two-year parts and one year labor warranty**

OPTIONS & ACCESSORIES

- ☐ Pre-filters
- ☐ 10" to 12" adjustable legs (adjustable by 2" for leveling)
- ☐ HEPA / carbon-charcoal filter packs
- ☐ Round exhaust duct adapter for remote exhaust flue

CERTIFICATIONS

Certifications Pending

2M-Z21323-04/18



Wells Manufacturing • 265 Hobson Street, Smithville, Tennessee 37166 U.S.A.
Phone : (314) 678-6314 • Fax (314) 781-3636
www.wells-mfg.com • Printed in the U.S.A.

Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.



Universal Ventless Hood

MODEL □ WVU-72

GENERAL LAYOUT DATA SANITATION




NSF/ANSI 2 UL710B

MODEL WVU-72 UNIVERSAL VENTLESS HOOD SYSTEM

VOLTAGE AC 60 HZ	AMPS 1 PH	HORSE POWER	TYPICAL AIRFLOW	MAX GREASE EMISSIONS	CLEARANCE TO COMBUSTIBLES	SOUND LEVEL dBA AVG	UNDER HOOD LED LIGHTING
208/240	3.5	1.0	1500 CFM	.0029 LB/HR/FT	N/A	68	2000 LUMENS

UL CAT. YZCT RECIRCULATING SYSTEM FILE NO. MH48408

SPECIAL ENVIRONMENTAL NOTICE: THE HOOD SYSTEM IS DESIGNED TO REDUCE EMISSIONS BUT WILL NOT COMPLETELY ELIMINATE COOKING AROMAS. AIR EXCHANGE AT THE INSTALLATION SITE MUST COMPLY WITH REQUIREMENTS OF THE LOCAL JURISDICTIONAL AUTHORITY. A MINIMUM OF 200 CUBIC FEET OF FRESH AIR PER MINUTE PER LINEAR FOOT OF HOOD IS REQUIRED INTO THE AREA TO COMPLY WITH THE UNIVERSAL MECHANICAL CODE AND FOR THE DILUTION OF COOKING AROMAS.

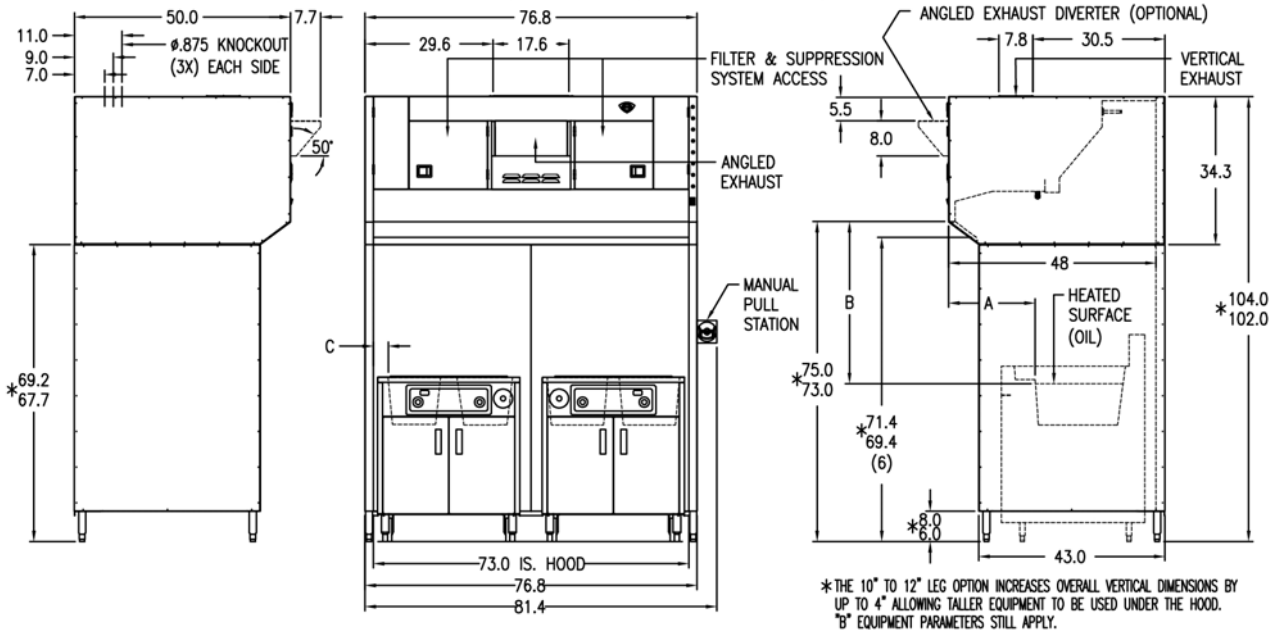

EQUIPMENT PARAMETERS APPLIANCE TYPE	MAXIMUM KW/FT	MAX COOKING TEMPERATURE	MAXIMUM SINGLE APPLIANCE HEATED COOKING SURFACE LENGTH	DIM A (3) MINIMUM	DIM B (4) MINIMUM	DIM B (4) MAXIMUM	DIM C (5) MINIMUM
FRYER	16.9	400	18	24 (EDGE OF OIL)	37	42	0
GRIDDLE	5.5	450	36	20 (EDGE OF HEATED PLATE)	30	38	1
RANGE (2) /HOTPLATE	5.5	N/A	48	18 (EDGE OF HEATED PLATTEN)	37	42	0
WOK	7.0	N/A	48	21 (EDGE OF HEATED SURFACE)	37	42	0
VERTICAL BROILER	7.0	N/A	25	20 (EDGE OF HEATED SURFACE)	10	N/A	0
OVEN	N/A	575	48	6 (FRONT EDGE OF DOOR)	8	N/A	0
BRAISING PAN /SKILLET (1)	4.5	550	48	14 (EDGE OF HEATED SURFACE)	37	42	0
CONVECTION OVEN	N/A	575	48	6 (FRONT EDGE OF DOOR)	8	N/A	0
STEAMER / COMBI OVEN	N/A	575	48	6 (TOP EDGE OF DOOR)	20	N/A	0
STEAM JACKETED KETTLE	16.9	450	48	14 (EDGE OF OF HEATED SURFACE)	30	42	0
SANDWICH GRILL (1)	4.5	550	36	18 (EDGE OF HEATED PLATTEN)	30	42	0
CONVEYOR OVEN	4.5	N/A	23	6 (EDGE OF HEATED SURFACE)	8	42	0

- (1) LID MUST NOT INTERFERE WITH SUPPRESSION NOZZLE DISCHARGE PATTERN.
- (2) PLUS OVEN KW IF APPLICABLE.
- (3) FRONT OF HOOD TO FRONT EDGE OF HEATED COOKING SURFACE.
- (4) BOTTOM FRONT EDGE OF HOOD TO HEIGHT OF HEATED COOKING SURFACE.
- (5) INSIDE OF HOOD SIDE TO EDGE OF COOKING SURFACE.
- (6) MAXIMUM FRONT OPENING.

THE HOOD AND ALL UNDER HOOD APPLIANCES MUST BE INSTALLED IN ACCORDANCE WITH THE STANDARD FOR VENTILATION CONTROL AND FIRE PROTECTION OF COMMERCIAL COOKING OPERATIONS NFPA 96, THE NATIONAL ELECTRIC CODE NFPA 70 AND ALL LOCAL CODES WHERE APPLICABLE. ALL UNDER HOOD APPLIANCES MUST BE INSTALLED AS PER MANUFACTURER INSTRUCTIONS AND CONTROLLED BY THE HOOD EQUIPMENT SHUTOFF INTERFACE THROUGH A CUSTOMER SUPPLIED CONTACTOR. SEE THE INSTRUCTION MANUAL FOR INTERFACE CONNECTION OPTIONS. APPLIANCES MUST MEET EQUIPMENT PARAMETERS DESCRIBED ABOVE. ONLY ELECTRICALLY HEATED APPLIANCES ARE ACCEPTABLE FOR INSTALLATION. PRIOR TO OPERATION THE FIRE SUPPRESSION SYSTEM MUST BE CHARGED AND CERTIFIED BY AN ANSUL® AUTHORIZED DISTRIBUTOR. ADEQUATE SIDE CLEARANCE MUST BE PROVIDED FOR SUPPLY CONNECTION AND SUPPRESSION MANUAL PULL ACCESS. EXHAUST IS SHIPPED FOR VERTICAL DISCHARGE AND FIELD CONVERTIBLE FOR HORIZONTAL DISCHARGE.

SHIPPING INFORMATION											
WEIGHTS				CARTON DIMENSIONS						CRATE SIZE	
SHIPPING WEIGHT		INSTALLED WEIGHT		WIDTH		DEPTH		HEIGHT			
POUNDS	KG	POUNDS	KG	INCHES	MM	INCHES	MM	INCHES	MM	CUBIC FEET	CUBIC METERS
1632	740	850	386	120	3048	63	1600	53.5	1359	234	6.63

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Wells exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



Wells Manufacturing • 265 Hobson Street, Smithville, Tennessee 37166 U.S.A.
Phone : (314) 678-6314 • Fax (314) 781-3636
www.wells-mfg.com • Printed in the U.S.A.

Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.