



50SCFE

DESCRIPTION

Star's Grill-Max® roller grills combine the highest quality and lasting performance with the latest technology—providing the most advanced roller grill in the industry. Roller grills are available in a variety of sizes and are perfect for snack bars, convenience stores, recreational facilities, stadiums, and virtually any other food service application.

SPECIFICATIONS

Grill-Max® roller grills are constructed of stainless steel and use tubular stainless steel sheath elements and your choice of roller coating where available. Heating elements are mounted in a fixed and floating system allowing for lateral expansion to minimize warping. Optional electronic temperature controls provide holding temperature ranges from 145°F to 190°F and cooking temperatures up to 220°F. The heavy-duty motor provides 360° rotation of rollers. The units will incorporate Seal-Max, Star's exclusive seal and bearing combination. These units have an eight [8] foot (2.44 m) cord and come with an appropriate NEMA plug to match their power usage and certification standards.

WARRANTY

These units come with a one [1] year warranty for parts and labor.

Job _____ Item No. _____

Grill-Max® Flat Roller Grills

Analog Control/Chrome Coating ☐30CF

Analog Control/Duratec Coating ☐30SCF ☐50SCF

Analog Control/Staltek Coating ☐50STF

Electronic Control/Duratec Coating ☐50SCFE

Electronic Control/Staltek Coating ☐45STFE ☐50STFE ☐75STFE

FEATURES

- Exclusive heavy-duty roller bearing design for longer life, smoother operation, and minimal grease-free maintenance
- Optional non-stick coatings offer increased durability
- Optional electronic controls allow for ideal cooking performance, sensing temperature changes and automatically adjusting
- Sectional heat control for mixed product flexibility
- Slim design offers maximum grill space with a minimum footprint
- Flat seating style configuration for the lowest profile possible.

OPTIONS & ACCESSORIES

- Roller coatings—chrome, Duratec, or Staltek.



Staltek coating

- Glass or polycarbonate sneeze guards
- Merchandising door [30RGMD-F for 30- and 45- models and 50RGMD-F for 50- and 75 models]
- Bun warmers or bun boxes
- Analog or electronic controls



electronic controls

ROLLER GRILL MODEL FORMULA

hot dog capacity ☐20 ☐30 ☐45 ☐50 ☐70

roller coating ☐chrome [C] ☐Duratec [SC] ☐Staltek [ST]

flat design ☐[F]

controls ☐analog [no letter] ☐electronic [E]

CERTIFICATIONS



STAR MANUFACTURING INTERNATIONAL INC.
265 Hobson Street • Smithville, Tennessee 37166
Telephone 800 264 7827 • Fax 314 781 5445
www.star-mfg.com

Printed in the U.S.A. • 2M-Z21716 • Rev B • 07.2018
Specifications are subject to change without notice
and are not intended for installation purposes.



Grill-Max® Flat Roller Grills


Analog Control/Chrome Coating **□30CF**

Analog Control/Duratec Coating **□30SCF □50SCF**

Analog Control/Staltek Coating **□50STF**

Electronic Control/Duratec Coating **□50SCFE**

Electronic Control/Staltek Coating **□45STFE □50STFE □75STFE**

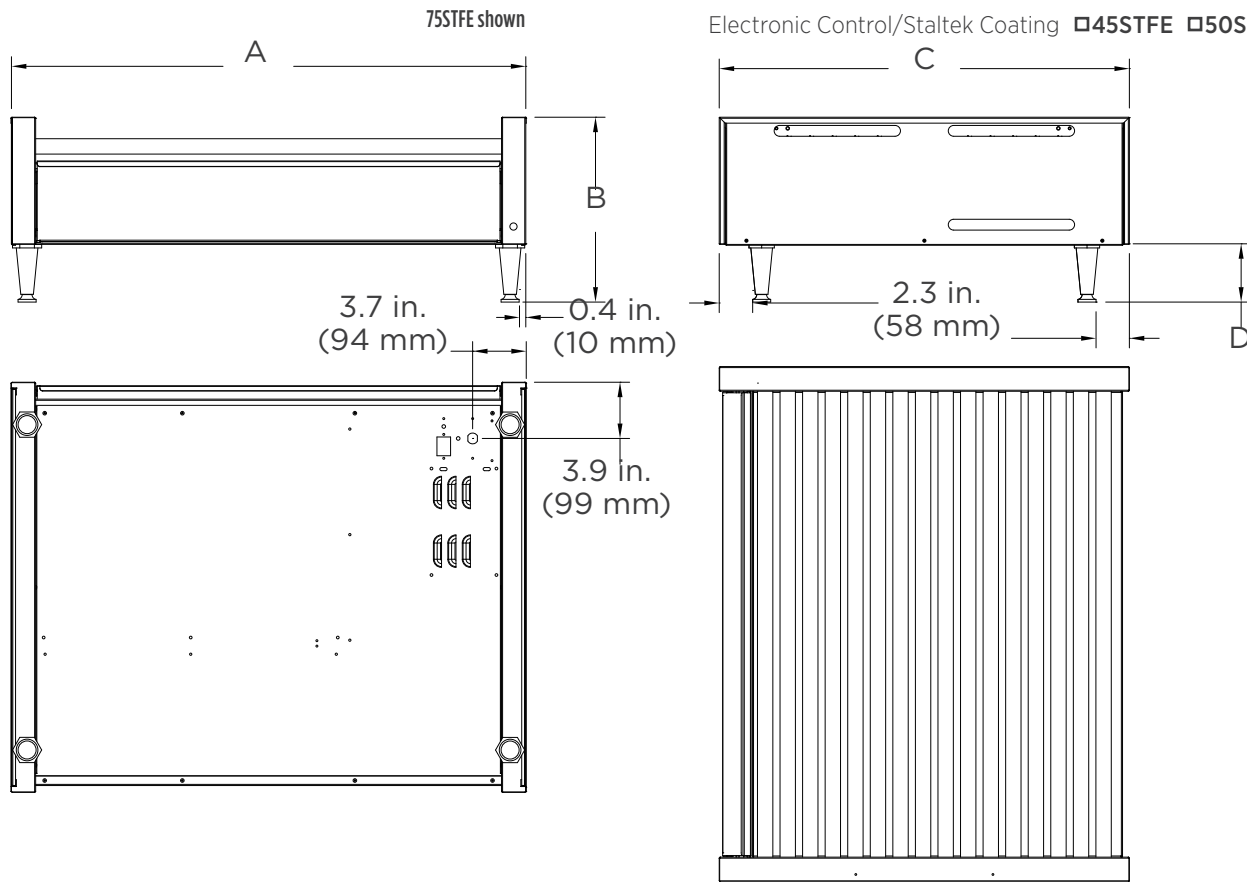

HOT DOG CAPACITY	WIDTH [A]	HEIGHT [B]	DEPTH [C]	LEG HEIGHT [D]	VOLTS	WATTS	AMPS	NEMA PLUG	APPROX. SHIP WEIGHT	APPROX. WEIGHT INSTALLED
30 Hot Dogs	23.75 in. (603 mm)	9.8 in. (249 mm)	20.625 in. (524 mm)	1 in. (25 mm)	120 230	1,150 1,150	9.6 5	5-15P CEE 7/7	53 lb. (24 kg)	42 lb. (19.1 kg)
45 Hot Dogs	23.75 in. (603 mm)	9.8 in. (249 mm)	28.4 in. (721 mm)	1 in. (25 mm)	120	1,650	13.6	5-15P ¹	68 lb. (30.8 kg)	50 lb. (22.7 kg)
50 Hot Dogs	35.75 in. (908 mm)	9.8 in. (249 mm)	20.625 in. (524 mm)	1 in. (25 mm)	120 230	1,535 1,535	12.8 6.7	5-15P ¹ BS1363 ²	70 lb. (31.8 kg)	53 lb. (24 kg)
75 Hot Dogs	35.75 in. (908 mm)	12.8 in. (325 mm)	28.4 in. (721 mm)	4 in. (102 mm)	208/ 240	1,810/ 2,400	8.7/10	6-20P	108 lb. (49 kg)	80 lb. (36.3 kg)

¹5-20P for CSA ²with 10-amp fuse

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



STAR MANUFACTURING INTERNATIONAL INC.

265 Hobson Street • Smithville, Tennessee 37166

Telephone 800 264 7827 • Fax 314 781 5445

www.star-mfg.com

Printed in the U.S.A. • 2M-Z21716 • Rev B • 07.2018
Please refer to the owner's manual for information regarding installation or use.